




SITE PLAN EXHIBIT OF FIRE SHEDS

3300 PANORAMA ROAD, MORRO BAY, CA

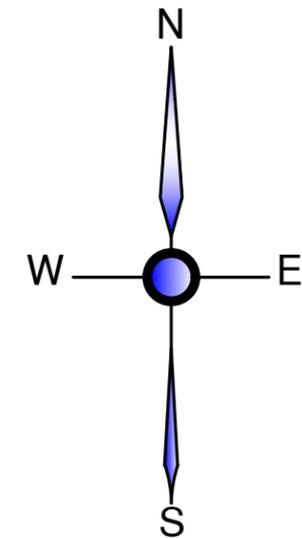

SCALE: 1" = 80'

CONSTRUCTION NOTES:

- ① FIRE HYDRANT AND SHED TO BE REMOVED FROM OVER THE FENCE. SHED NEEDS TO BE REMOVED INTACT AND TAKEN OFFSITE FOR ANY ASBESTOS ABATEMENT WORK. FIRE HYDRANT TO BE REMOVED AND WATER PIPE CAPPED AND LEFT IN PLACE. CONCRETE PAD MUST REMAIN IN PLACE.
- ② SHED TO BE UNBOLTED AND REMOVED INTACT AWAY FROM PUBLIC STREET WITH CULTURAL AND ARCHAEOLOGICAL MONITORING. CONCRETE PAD UNDER SHED TO REMAIN IN PLACE.
- ③ FIRE HYDRANT TO BE REMOVED AND PIPE CAPPED AND LEFT IN PLACE.

NOTE:

- GEOLOGIST MUST BE ON-SITE FOR ALL ASBESTOS WORK
- REMOVAL OF FALLEN TREES TO BE IN ACCORDANCE WITH PROCEDURE PROVIDED IN BIOLOGIST REPORT.



DIVERSIFIED PROJECT SERVICES
INTERNATIONAL

San Luis Obispo (805) 250-2891 Bakersfield, CA (661) 371-2800 Long Beach (562) 424-6400

THE DELIVERY OF THIS DRAWING SHOULD NOT BE CONSTRUED TO PROVIDE AN EXPRESS WARRANTY OR GUARANTEE TO ANYONE THAT ALL DIMENSIONS AND DETAILS ARE EXACT OR TO INDICATE THAT THE USE OF THIS DRAWING IMPLIES THE REVIEW AND APPROVAL OF DPSI OF ANY FUTURE USE. ANY USE OF THIS INFORMATION IS AT THE SOLE RISK OF THE USER.

PROJECT: 160556

www.dpsiinc.com

PLOT DATE 2.5.2019